



Stereoscopic Microscope SMZ745/745T

Nikon's stereoscopic microscope with 7.5x zoom and 115 mm working distance — a superior model in this category

7.5x zoom: extremely high zoom range

The SMZ745/745T boasts a 7.5x zoom that incorporates the Greenough optical system. The zoom range of 0.67x to 5x provides a broad observation range.



Superior 115 mm working distance

As well as high zoom ratio and magnification, the SMZ745/745T offers a long 115 mm working distance.



Trinocular optical head is ideal for monitoring and digital imaging (SMZ745T only)

The SMZ745T incorporates an optical path switching lever that enables easy switchover between eyepiece and camera. Nikon Digital Sight series camera can be attached.



Optical path switching lever



With Digital Sight series camera for microscopes

Three "A" design

The airtight, anti-mold, anti-electrostatic design makes the SMZ745 suitable for use in a range of working environments.

* The SMZ745T has an anti-mold, anti-electrostatic design.



SMZ745


SMZ745T

Specifications


Optical system	Greenough optical system
Total magnification	3.35-300x (depending on eyepiece and auxiliary objective used)
Vertical tube	Built-in C-mount 0.55x magnification lens (F.N. 11), compatible with 2/3 in. or smaller CCD
Eyepiece tube	Fixed type
Eyepiece inclination	45 °
Interpupillary distance adjustment	52-75 mm
Eyepieces (with diopter adjustment)	C-W 10xB (F.N. 22), C-W 15x (F.N. 16), C-W 20x (F.N. 12.5), C-W 30x (F.N. 7)
Zoom range	0.67-5x
Zoom ratio	7.5 : 1
Auxiliary objectives	G-AL 0.5x (W.D. 211 mm), G-AL 0.7x (W.D. 150 mm), G-AL 1.5x (W.D. 61 mm), G-AL 2x (W.D. 43.5 mm)
Working distance	115 mm (standard)
Weight	1.55 kg (SMZ745), 1.8 kg (SMZ745T)

F.N.: Field Number

System diagrams

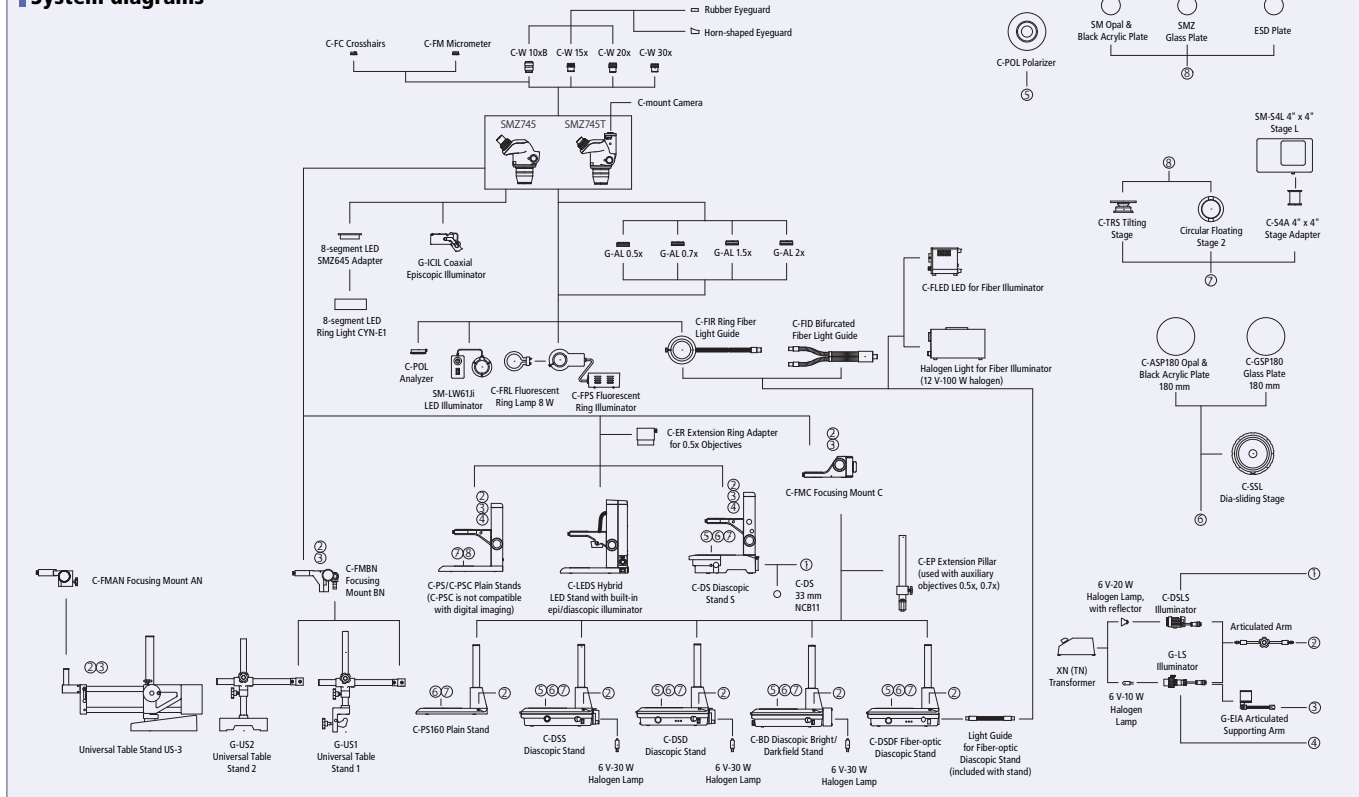

Dimensional diagrams

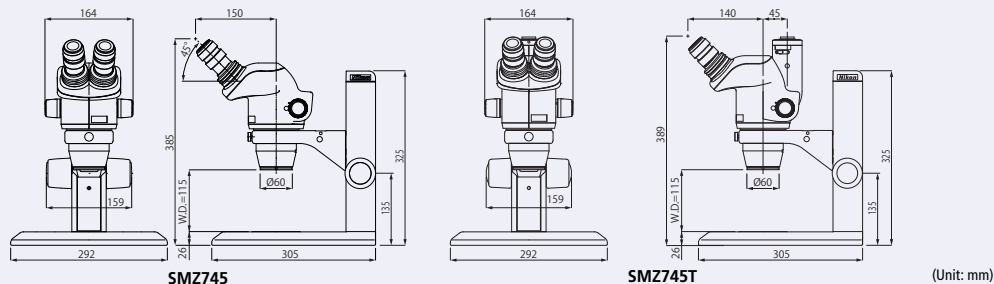

WARNING

TO ENSURE CORRECT USAGE, READ THE CORRESPONDING MANUALS CAREFULLY BEFORE USING YOUR EQUIPMENT.

N.B. Export of the products* in this catalog is controlled under the Japanese Foreign Exchange and Foreign Trade Law. Appropriate export procedure shall be required in case of export from Japan.

*Products: Hardware and its technical information (including software)
* Monitor images are simulated.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. January 2011 ©2011 NIKON CORPORATION



NIKON CORPORATION

Shin-Yurakucho Bldg., 12-1, Yurakucho 1-chome, Chiyoda-ku, Tokyo 100-8331, Japan
Bio Science phone: +81-3-3216-2375 fax: +81-3-3216-2385
Industrial Instruments phone: +81-3-3216-2384 fax: +81-3-3216-2388
<http://www.nikon.com/instruments/>



ISO 9001 Certified
for NIKON CORPORATION
Instruments Company



ISO 14001 Certified
for NIKON CORPORATION



ООО «БиоГен-Аналитика»

115093, Москва, Партийный пер., д.1, корп. 58, стр.1
тел./факс: +7 499 704 62 44
e-mail: 84997046244@bga.su
www.bga.su